


DUSTOMAT 4-10 W3 (Display)

(097.233)

Mains voltage (V)	400	Filter surface (m ²)	10
Nominal power (kW)	2.2	Filter quantity (pc)	2
Mains frequency (Hz)	50	Cleaning type	Jet pulse
Nominal current (A)	4.5	Collection volume (liter)	38
Circuit breaker (A)	C16	Dimensions (L x W x H) (mm)	1,440 x 920 x 1,440
Max. volume flow (m ³ /h)	2,000	Weight (kg)	240
Max. neg. pressure (Pa)	2,600	Comp. air consumption* (l/impuls)	19
Intake opening Ø (mm)	160	Comp. air connection (bar)	4 - 6
Sound pressure level LpA(dBA)	68	* at 4 bar with valve opening 0,12 sec	

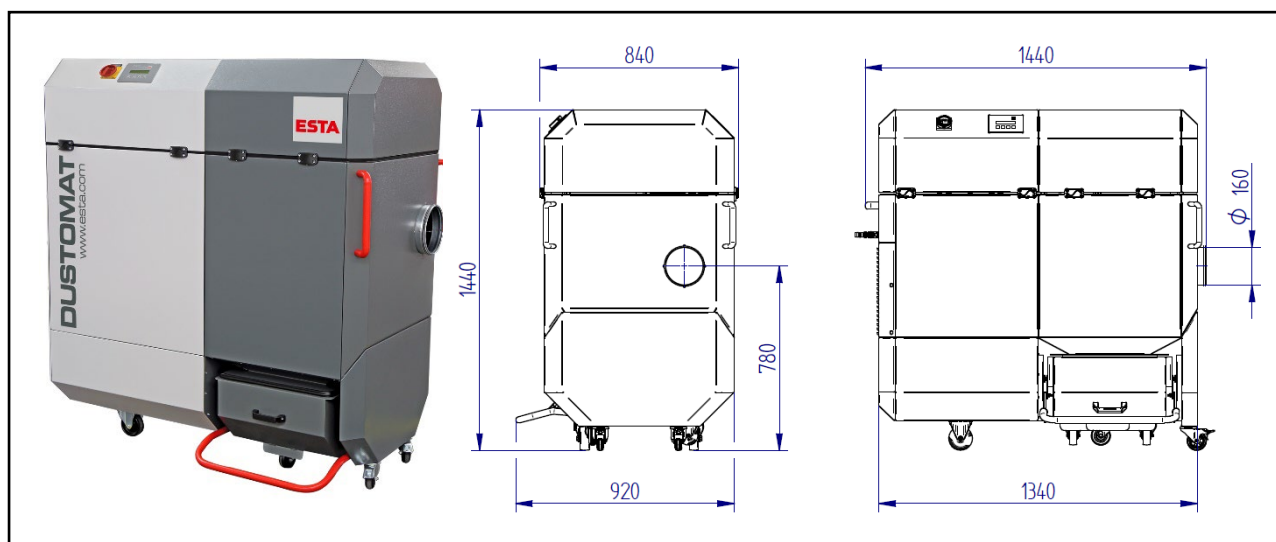

ESTA PLUS

Application range:

- Dust extraction at individual or multiple workstations or machines in industrial plants or smaller shops
- Dry, pourable, non-flammable welding fumes
- For the extraction of fumes from high-alloy chrome/nickel steels (according to DIN EN ISO 15012-1)

Your benefits at a glance

- All-purpose for dust and shavings
- Compact and powerful
- Convenient dust disposal
- Extremely quiet operation
- Low operating costs
- W3- certified device (IFA)

Characteristics:

- Pulse-jet filter cleaning system
- Cleanable long life cartridge filters (dust classification M)
- Integrated impact separator
- Mobile dust collection drawer for easy disposal
- Mobile on rolls
- Newly designed ESTA control with touch display
- Sensors for volume flow monitoring and power control
- Test certificate: welding fume extraction class W3 (IFA)

Custom design/optional:

with different filter cartridges, exhaust air connection, special voltage, special painting, pre separators, external control with potential-free contact

State of the art: 097233-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
89250 Senden / GERMANY

Phone +49 7307 804-0
Fax +49 7307 804-500
E-Mail info@esta.com

www.esta.com