


DUSTOVAC 5.5 Jet

(83.112)

Mains voltage	(V)	400	Main filter surface	(m ²)	9,6
Nominal power	(kW)	5,5	Main filter quantity	(pc)	4
Mains frequency	(Hz)	50	Main filter dust class		„M“
Nominal current	(A)	10,5	Cleaning type		Jet system
Circuit breaker	(A)	C32	Intake opening	(mm)	70
Max. volume flow	(m ³ /h)	480	Collection volume	(liter)	200
Max. neg. pressure	(Pa)	25.000	Dimensions (L x W x H)	(mm)	1.830 x 782 x 2.040
Sound pressure level	LpA(dBA)	77	Weight	(kg)	230
Com. air connection	(inch)	¼"			

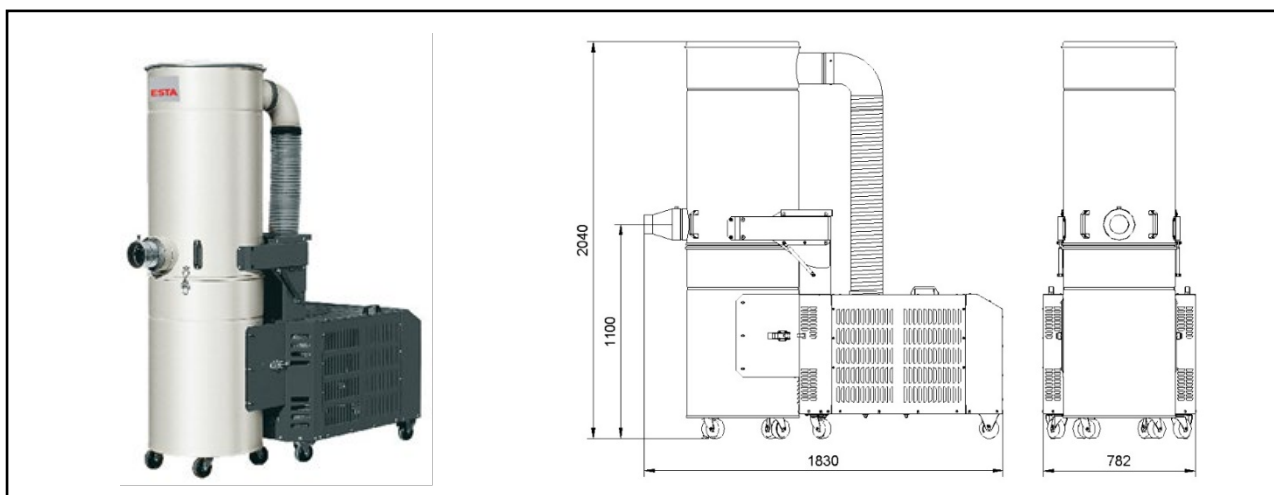

ESTA PLUS

Application range:

- Single and multi-station extraction in industrial enterprises and workshops
- Pourable and dry dust, toxic dust and dry chips

Your benefits at a glance:

- Side channel blower for high suction power
- Low operating costs
- Low noise
- Patented tilt filter housing for convenient dust disposal
- Fully automatic cleaning during the working process

Characteristics:

- Filter cleaning system:
Automatic pulse-jet filter cleaning system
- Cleanable long life cartridge filters (dust classification M)

Options:

- Special equipment with different filter cartridges
- exhaust air socket
- special voltage
- special painting
- pre-separator
- external control via potential-free contact possible

State of the art: 83112-51-02 Subject to change without notice! For remaining questions please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
89250 Senden / GERMANY

Phone +49 7307 804-0
Fax +49 7307 804-500
E-Mail info@esta.com

www.esta.com