


Wet separator

X45901 / VAN24-12844

# DUSTOMAT Hydro 10000



Exemplary presentation

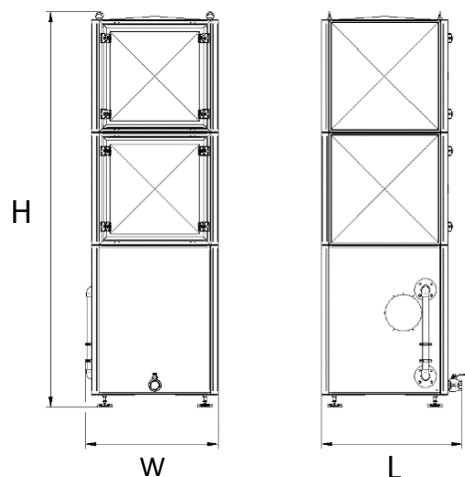

## Technical data

Mains voltage	400 V	Sound pressure level	[dBA] 80,5
Nominal power	15 kW	Water connection	3/4"
Nominal current	25,3 A	Water drainage	2"
Mains frequency	50 Hz	Water content	515 L
Circuit breaker	C50A	Weight	870 Kg
Max. negative pressure	4.800 Pa	Intake opening	∅ 400 mm
Max. volume flow	10.000 m <sup>3</sup> /h	Dimensions (L x B x H)*	1.350 x 1.550 x 3.400 mm

\* Dimensions without control cabinet

## Application Range

- » Extraction of metallischen Stäuben (Stahl, Edelstahl, Messing, Kupfer)
- » For the single or multi-station extraction of dry, free flowing, electrically conductive materials
- » Ideal solution for heavy flying sparks

## Special Features

- » Components in contact with media made of Stainless steel: V2A (DIN 1.4301); remaining components from Steel: S235 JR
- » Filter stage 1: Separation via innovative washer chamber with particularly high degree of separation, 98,7% even with the smallest particle fractions of  $\geq 15 \mu\text{m}$
- » Filter stage 2: Downstream droplet separator with optimised maintenance access, which reduces the residual moisture content of the exhaust air to a minimum
- » Filter stage 3: With post-filter (F9)

## Configuration example

- » ESTA standard painting (with C3/H)
- » Operating duration: Single shift operation
- » Operating mode: Air recirculation operation
- » Intake port position: Right
- » Fill level tube position: Left
- » Switch cabinet becomes Unassembled
- » Accessory package: Noise package
- » With potential-free contact (On/Off)
- » Monitoring functions: Operating message, Fill level monitoring & automatic filling, Maintenance & operating hours counter, Safety filter monitoring
- » Country-specific regulations: EU
- » Device signage: ESTA / German