


# RG-500

(01451001)

Motor	(kW)	4.0	max. airflow	(m <sup>3</sup> /h)	4,000
Voltage	(V)	400	airflow <sub>opt.</sub>	(m <sup>3</sup> /h)	3,100
Rated frequency	(Hz)	50			
Ampere	(A)	7.7	max. neg. pressure <sub>static</sub>	(Pa)	3,250
Fuse	(A)	C16	max. neg. pressure <sub>total</sub>	(Pa)	3,400
rpm	(1/min)	2,910	neg. pressure <sub>opt. static</sub>	(Pa)	3,200
rpm <sub>opt.</sub>	(1/min)	2,900	neg. pressure <sub>opt. total</sub>	(Pa)	3,300
Noise level (Lpa)	(dB[A])	84	Overall efficiency: (η)		64
Weight	(kg)	82	Measurement category		B, D
Intake	(mm)	249	Efficiency category		total
Outtake	(mm)	314	Efficiency grade <sub>opt.</sub>		64
Dimensions (L x W x H)	(mm)	711 x 700 x 1,012	VSD required		

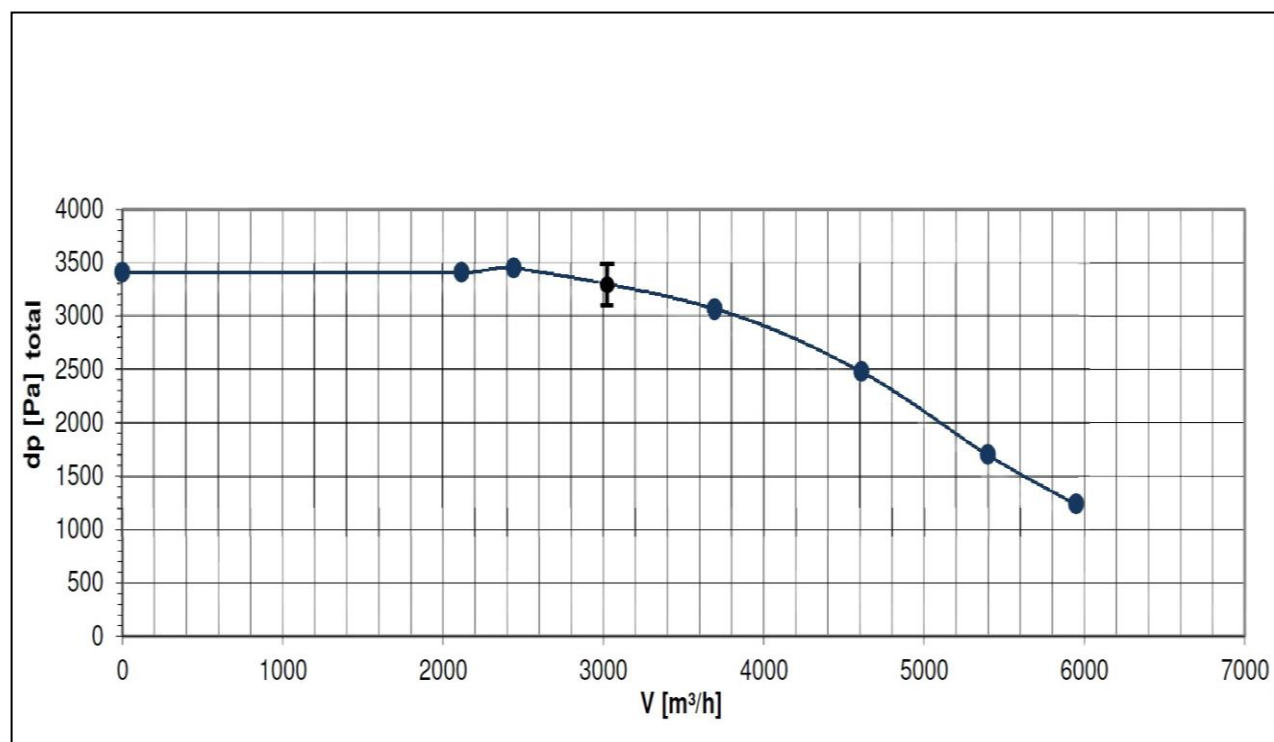

## ESTA PLUS

### Application Range:

Extraction of filtered process air at individual and multiple workstations in industrial and skilled trade applications

### Characteristic:

Adjustable exhaust air outlet

State of the art: 01451001-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.