


RG-800

(01481001)

Motor	(kW)	7.5	max. airflow	(m ³ /h)	8,000
Voltage	(V)	400	airflow _{opt.}	(m ³ /h)	5,950
Rated frequency	(Hz)	50			
Ampere	(A)	13.9	max. neg. pressure _{static}	(Pa)	3,900
Fuse	(A)	C25	max. neg. pressure _{total}	(Pa)	3,950
rpm	(1/min)	2,930	neg. pressure _{opt. static}	(Pa)	3,250
rpm _{opt.}	(1/min)	2,930	neg. pressure _{opt. total}	(Pa)	3,650
Noise level (Lpa)	(dB[A])	84	Overall efficiency: (η)		64
Weight	(kg)	125	Measurement category		B, D
Intake	(mm)	354	Efficiency category		total
Outtake	(mm)	399	Efficiency grade _{opt.}		69
Dimensions (L x W x H)	(mm)	820 x 1,000 x 1,198	VSD required		

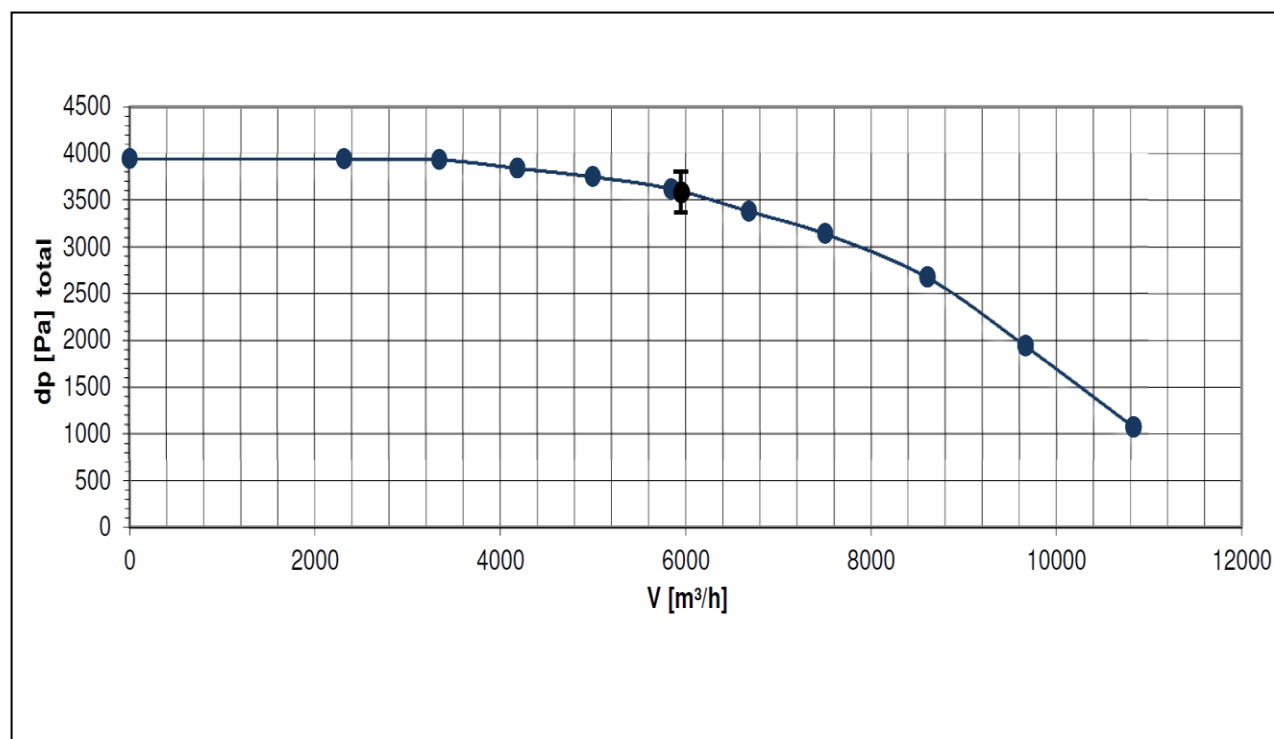

ESTA PLUS

Application Range:

Extraction of filtered process air at individual and multiple workstations in industrial and skilled trade applications

Characteristic:

Adjustable exhaust air outlet

State of the art: 01481001-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.