


## STYROSOG 2000

(03.021)

Motor	(kW)	1,3	max. airflow	(m <sup>3</sup> /h)	2.000
Voltage	(V)	230	Max. neg. pressure	(Pa)	1.800
Current	(A)	8,3	Intake	(mm)	103
Rated frequency	(Hz)	50	Weight	(kg)	125
Fuse	(A)	16	Dimensions	(mm)	1.000 x 535 x 1.785

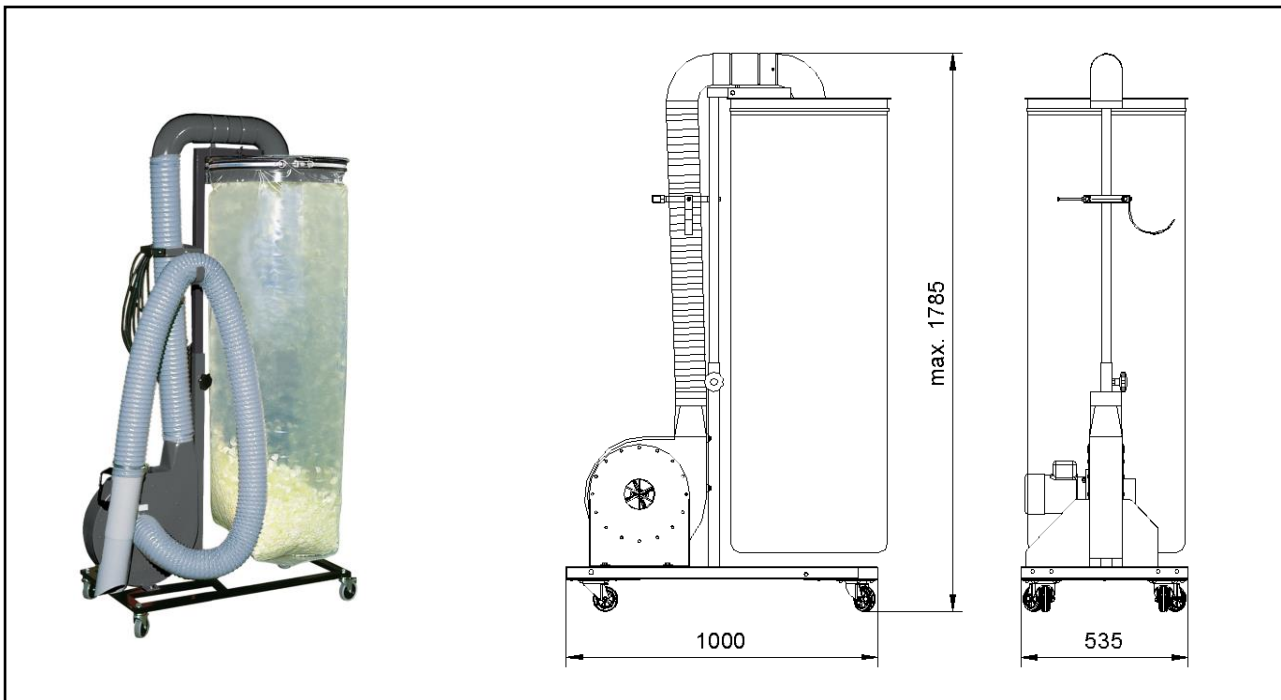

## ESTA PLUS

### Application range:

- Warehouse and packaging areas

### Characteristics:

- for Styrofoam packing chips

### Your benefits at a glance:

- Easy handling
- Cost efficient through reuse of the Styrofoam
- packaging chips

State of the art: 03021-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.