


# **DUSTOMAT 100-S / 400 V**

(09.497)

Voltage	(V)	400
Motor	(kW)	1,1
Ampere	(A)	2,6
Rated frequency	(Hz)	50
Fuse	(A)	16
max. neg. pressure	(Pa)	2,800
max. air flow	(m³/h)	720

Filter surface	(m²)	0,75
No. of filter elements	(pc)	1
Filter material	cotton with paper filter bag	
Intake	ø (mm)	100
Weight	(kg)	100
Dust collection bin	(liter)	100
Dimension (L x W x H)	(mm) 1.075 x	330 x 1.075

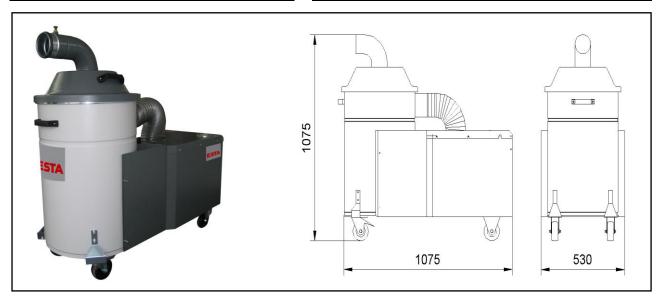

## **ESTA PLUS**

## **Application range:**

- •Extraction in textile an flocking industry, Manual workstations
- •Especially suitable for the extraction of sticky and fibrous dust and dust that tend to clump

## **Characteristics:**

•Filter: Fabric filter element with primary paper filter bag

### Your benefits at a glance

- •Specialized dust extractor for sticky dust and dust containing
- •Long fibres
- •Compact design with high extraction performance
- •Easily replaceable paper filter bag to collect the dust

### Custom design/optional:

•Optional type examination certificatespecial voltage

State of the art: 09497-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.