


(09.504)

DUSTOMAT 140-S

Voltage	(V)	400	Filter surface	(m²)	1
Motor	(kW)	3	No. of filter elements	(pc)	1
Ampere	(A)	6,3	Filter material	cotton with paper filter bag	
Rated frequency	(Hz)	50	Intake	ø (mm)	140
Fuse	(A)	16	Weight	(kg)	200
max. neg. pressure	(Pa)	3,800	Dust collection bin	(liter)	200
max. air flow	(m³/h)	1,330	Dimension (L x W x H)	(mm) 1.653 x 782 x 1.353	

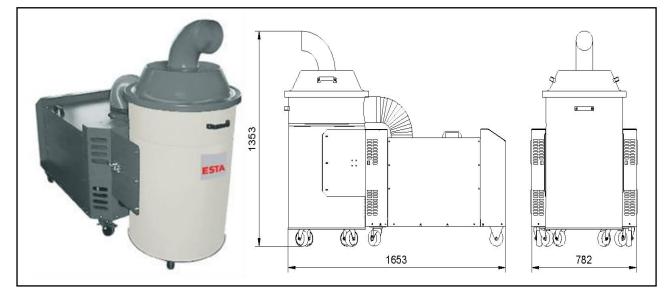

ESTA PLUS

Application range:

- •Extraction in textile an flocking industry, Manual workstations
- •Especially suitable for the extraction of sticky and fibrous dust and dust that tend to clump

Characteristics:

•Filter: Fabric filter element with primary paper filter bag

Your benefits at a glance

- •Specialized dust extractor for sticky dust and dust containing •Long fibres
- •Compact design with high extraction performance
- •Easily replaceable paper filter bag to collect the dust

Custom design/optional:

•Optional type examination certificate

State of the art: 09504-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG Gotenstraße 2 – 6 89250 Senden/GERMANY Phone +497307804-0 Fax +497307804-500 E-Mail info@esta.com

