


DUSTOMAT 160-S

(09.506)

Voltage	(V)	400	Filter surface	(m ²)	1
Motor	(kW)	3	No. of filter elements	(pc)	1
Ampere	(A)	6,3	Filter material	cotton with paper filter bag	
Rated frequency	(Hz)	50	Intake	∅ (mm)	160
Fuse	(A)	16	Weight	(kg)	200
max. neg. pressure	(Pa)	4,600	Dust collection bin	(liter)	200
max. air flow	(m ³ /h)	1,850	Dimension (L x W x H)	(mm)	1.653 x 782 x 1.353

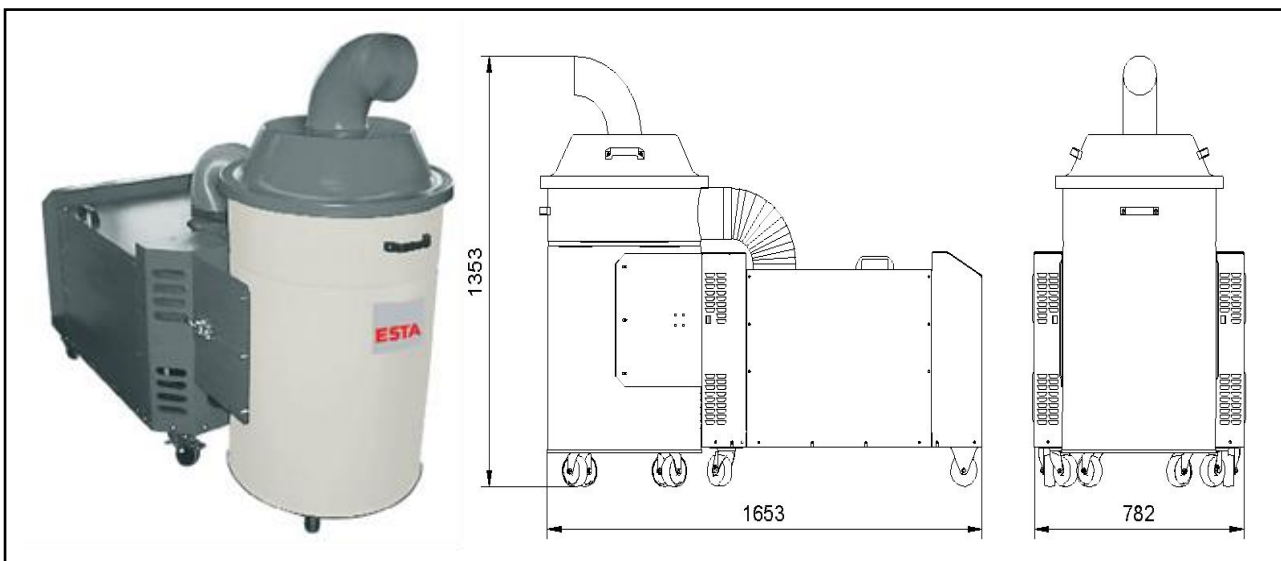

ESTA PLUS

Application range:

- Extraction in textile an flocking industry, Manual workstations
- Especially suitable for the extraction of sticky and fibrous dust and dust that tend to clump

Characteristics:

- Filter: Fabric filter element with primary paper filter bag

Your benefits at a glance

- Specialized dust extractor for sticky dust and dust containing
- Long fibres
- Compact design with high extraction performance
- Easily replaceable paper filter bag to collect the dust

State of the art: 09506-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
89250 Senden / GERMANY

Phone +49 7307 804-0
Fax +49 7307 804-500
E-Mail info@esta.com

www.esta.com