


DUSTOMAT 4-10 ATEX (Display)

(09.732)

Voltage	(V)	400	Mainfilter surface	(m ²)	10
Motor	(kW)	2.2	No. of mainfilter elements	(pc)	2
Frequency	(Hz)	50	Main filter dust classification	M - filter cartridge	
Fuse	(A)	C16	Filter cleaning	Jet cleaning system	
max. air volume flow	(m ³ /h)	2,000	Control filter surface	12,8	
max. neg. pressure	(Pa)	2,600	No. of control filter elements	1	
Intake	(mm)	160	Control filter classification	H14 - filter cassette	
Sound level	dB(A)	68	Dust collection bin	(liter)	38
Comp. air requirement*	(l/Impuls)	approx. 19	Dimension (L x W x H)	(mm)	1.390 x 935 x 1.440
Comp. air connection	(bar)	4 – 6	Weight	kg	260

*at 4 bar with a valve opening time of 0.12 sec.

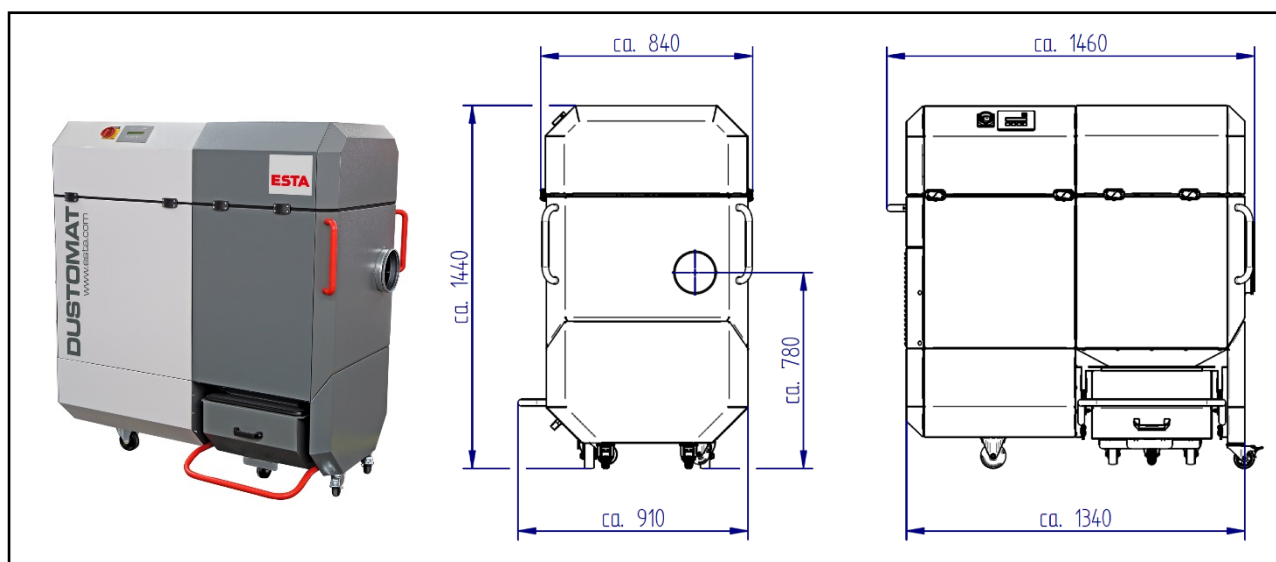

ESTA PLUS

Application range:

- Single or multi-station extraction in industry and trade
- Pourable, dry, flammable, conductive dust and shavings
- Installation location: EX-zone-free on the outside

Your benefits at a glance

- All-purpose for dust and shavings
- Compact and powerful
- Low operating costs
- Convenient dust disposal
- Extremely quiet operation
- New innovative cabinet design, therefore providing a small footprint

Characteristics:

- Integrated impact separator
- Mobile dust collection drawer for easy disposal
- Mobile on rolls
- Main filter: Cleanable long life cartridge filters (dust classification M)
- Control filter: Filter cassette dust classification H
- ATEX marking

Optional:

With different filter cartridges, exhaust air connection, special voltage, special painting, pre-separators, external control with potential-free contact

State of the art: 09732-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
89250 Senden / GERMANY

Phone +49 7307 804-0
Fax +49 7307 804-500
E-Mail info@esta.com

www.esta.com