


# DUSTOMAT 4-24 ATEX (Display) (09.762)

Voltage	(V)	400
Motor	(kW)	4.0
Frequency	(Hz)	50
Fuse	(A)	C16
max. air volume flow	(m³/h)	3,300
max. neg. pressure	(Pa)	3,600
Intake	(mm)	200
Sound level	dB(A)	72
Comp. air requirement*	(l/Impuls)	approx. 19
Comp. air connection	(bar)	4 – 6

Mainfilter surface	(m²)	24
No. of mainfilter elements	(pc)	2
Main filter dust classification	1	M - filter cartridge
Filter cleaning		Jet cleaning system
Control filter surface		17
No. of control filter element	S	1
Control filter classification		H14 - filter cassette
Dust collection bin	(liter)	38
Dimension (L x W x H)	(mm)	1.660 x 840 x 1.640
Weight	kg	310

<sup>\*</sup>at 4 bar with a valve opening time of 0.12 sec.

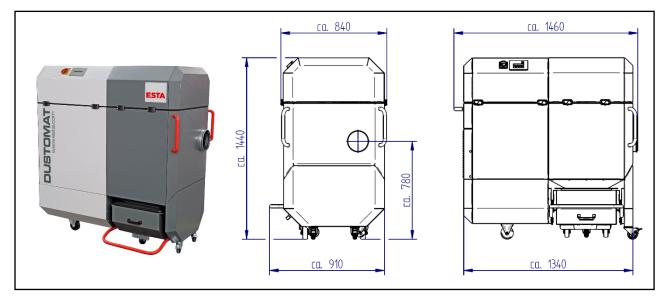

## **ESTA PLUS**

### **Application range:**

- $\bullet\,$  Single or multi-station extraction in industry and trade
- Pourable, dry, flammable, conductive dust and shavings
- Installation location: EX-zone-free on the outside

### Your benefits at a glance

- All-purpose for dust and shavings
- Compact and powerful
- Low operating costs
- Convenient dust disposal
- Extremely quiet operation
- New innovative cabinet design, therefore providing a small footprint

### **Characteristics:**

- Integrated impact separator
- Mobile dust collection drawer for easy disposal
- Mobile on rolls
- Main filter: Cleanable long life cartridge filters (dust classification M)
- Control filter: Filter cassette dust classification H
- ATEX marking

#### Optional:

With different filter cartridges, exhaust air connection, special voltage, special painting, pre-separators, external control with potential-free contact

State of the art: 09762-51-01 Subject to change without notice! For remaining questions, please do not hesitate to contact us.