


## MOBEX F-40 W3

(09.835)

Motor	(kW)	3,0	Filter surface	(m <sup>2</sup> )	40
Voltage	(V)	400	No. of filter elements	(pc)	2
Rated frequency	(Hz)	50	Filter cleaning		Jet-Pulse
Fuse	(A)	16	Dust collection drawer	(liter)	100 - 150
max.airflow	(m <sup>3</sup> /h)	2.800	Dimensions (L x W x H)	(mm)	1.910x1.040x2.030
max. neg. pressure	(Pa)	3.400	Weight	(kg)	ca. 310
Intake	(mm)	200	Comp. air requirement	(l/impuls)	ca. 19
Sound level	(dBA)	71	Comp. air connection	(bar)	4-6

\* with 4 bar and valve opening time of 0.12sec

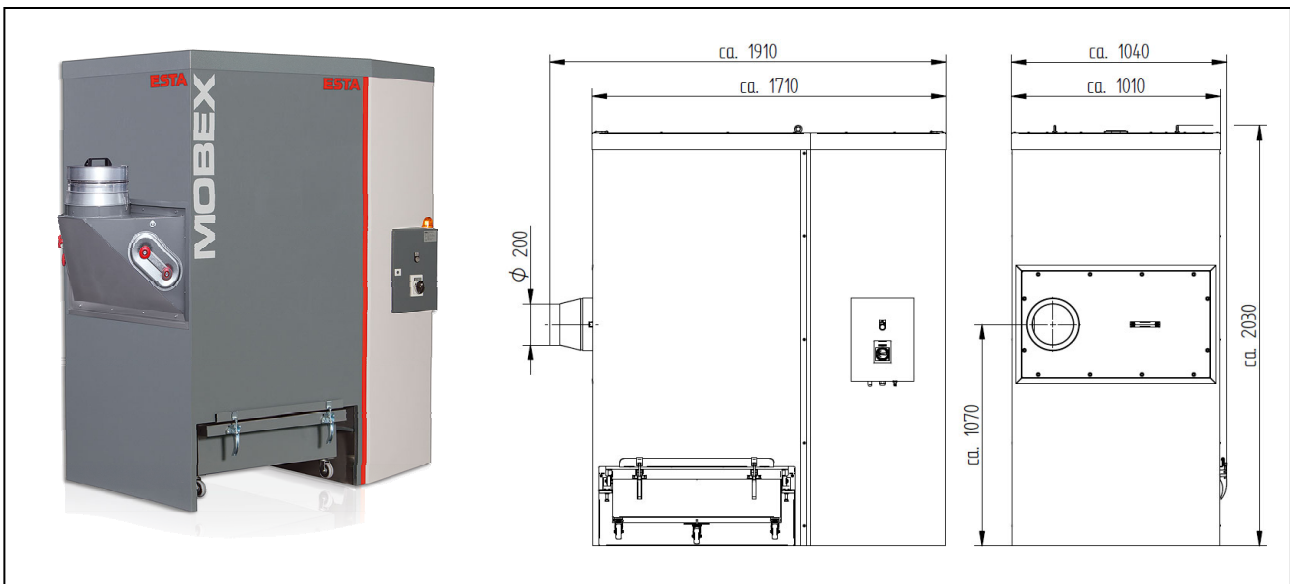

## ESTA PLUS

### Application range:

- Single and multiple extraction in industrial plants or smaller workshops
- Dry, pourable, non-flammable welding fumes
- For the extraction of smoke of steel with alloy content of e.g. nickel and chromium ≤ 30% and high-alloy steels

### Your benefits at a glance:

- All-purpose for welding fumes
- Tight and powerful
- Convenient dust disposal
- Low operation noise
- Low operating costs
- W3-certified device (IFA 1305020)
- Test requirements: DIN EN ISO 15012-1:2005

### Characteristics:

- Automatic jet pulse filter cleaning system
- Cleanable long life cartridge filters (dust classification M)
- Integrated impact separator
- Easy replaceable dust collection bins
- New housing structure of sandwich panel
- Certificate: W3 (IFA 1305020)

### Modification:

- Filter cartridges with advanced properties
- With pre-separator
- Mobile on wheels (H + 107 mm)
- With dry contact for external control
- Exhaust air socket

State of the art: 09835-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.