
NA-K 1800

(45.183)

Voltage	(V)	400
Motor	(kW)	3
Current (400V/50Hz)	(A)	10,4
Fuse	(A)	20
max. neg. pressure	(Pa)	4.300
max. airflow	(m³/h)	2.160

Water capacity		290
Water connection		G ¾"
Intake diameter	(mm)	180/280
Weight (without water)	(Kg)	340
Sludge tank	(Liter)	50
Dimensions (L x B x H)	(mm)	800 x 800 x 2.920

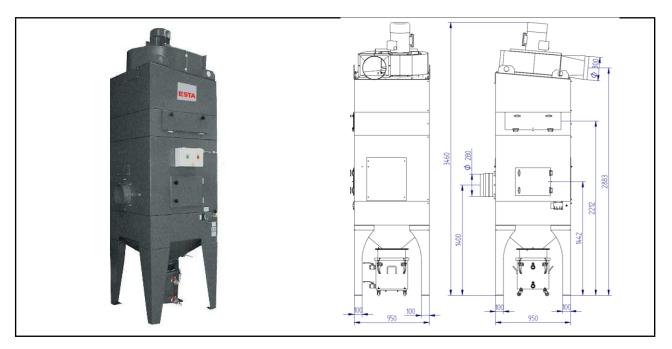

ESTA PLUS

Application range:

- •Extraction of aluminium dust
- •Dust extraction at individual or multiple workstations of adhesive and moistly dusts, especially metallic dusts that are sparks generating
- •As central exhaust station with intercepting pipe and several extraction points

Your benefits at a glance

- •High suction power for adhesive and moistly dusts
- •Ideal solution for sparks generating applications
- •High filtration efficiency (ESTA efficiency guarantee)

Characteristics:

•Especially recommended for grinding applications that are generating sparks Integrated c

Custom design/optional:

•with special painting

State of the art: 45183-51-00 Subject to change without notice! For remaining questions please do not hesitate to contact us..