


Wet vacuum unit NA-2.2 ATEX

(45.712)

Voltage	(V)	400
Motor	(kW)	1,1
Current (400V/50Hz)	(A)	4,8
Frequency	(Hz)	50
Fuse	(A)	16
max. neg. pressure	(Pa)	21.000
max. airflow	(m³/h)	300

(mm) 1.260 x 630 x 1.560
(kg) 130
(I) 35
(mm) 50

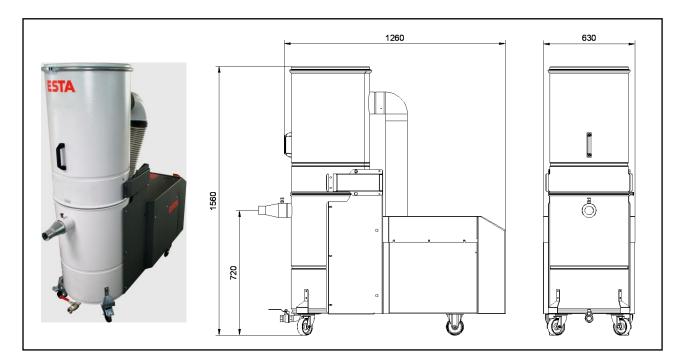

ESTA PLUS

Application range:

- •Extraction of sticky substances
- •Spark generating production processes
- Extraction of flammable, explosive and try substances
- •defined as "Zone 22" types of dust (ATEX-approved version)

Your benefits at a glance:

- •Extraction of aluminium dust
- •High suction power for sticky and wet dust
- •For spark generating production

Special Features:

- •Tilt back upper housing
- •Magnetic valve for automatic water supply (optional)
- Stainless steel (optional)
- •Especially recommended for grinding applications that are generating sparks

State of the art: 45712-51-01 Subject to change without notice! For remaining questions please do not hesitate to contact us.