


SRF T-2

(55.101)

Voltage	(V)	110	max. neg. pressure	(Pa)	19.000
Motor	(kW)	1,1	max. air flow	(m ³ /h)	200
Filter surface	(m ²)	0,8	Weight	(kg)	15
Rated frequency	(Hz)	50	Intake diameter	(mm)	50
Mode of operation		S3	Dimensions (L x B x H)	(mm)	390 x 210 x 500
Sound level	dB (A)	66			

*at 4 bar with valve opening 0,12 sec

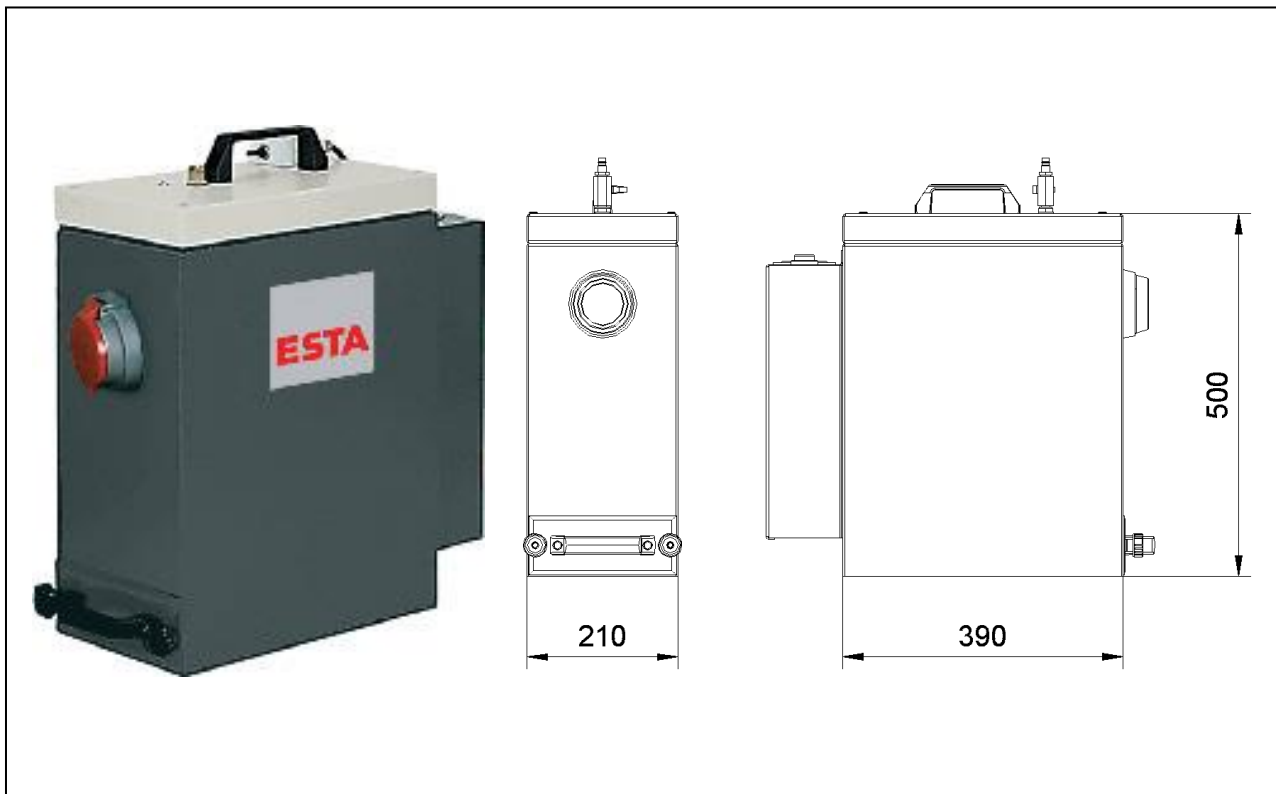

ESTA PLUS

Application Range:

- Outside work, assembly or construction sites.
- Non-alloy steels.

Your benefits at a glance:

- Portable units that can be used in any location.
- Compact and functional design.
- Low operating costs with cleanable long life cartridge filters (dust classification M).

Characteristic:

- Integrated compressed air cleaning nozzle.

Modifications:

- Custom design with custom colours.
- Filter cartridge for soldering fume.

State of the art: 55101-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
89250 Senden / GERMANY

Phone +49 7307 804-0
Fax +49 7307 804-500
E-Mail info@esta.com

www.esta.com