


## SRF T-4

(55.102)

Voltage	(V)	230	max. neg. pressure	(Pa)	19.000
Motor	(kW)	2,2	max. air flow	(m <sup>3</sup> /h)	400
Filter surface	(m <sup>2</sup> )	1,6	Weight	(kg)	27
Rated frequency	(Hz)	50	Intake diameter	(mm)	2 x 50
Mode of operation		S3	Dimensions (L x B x H)	(mm)	490 x 400 x 560
Sound level	dB (A)	66			

\*at 4 bar with valve opening 0,12 sec

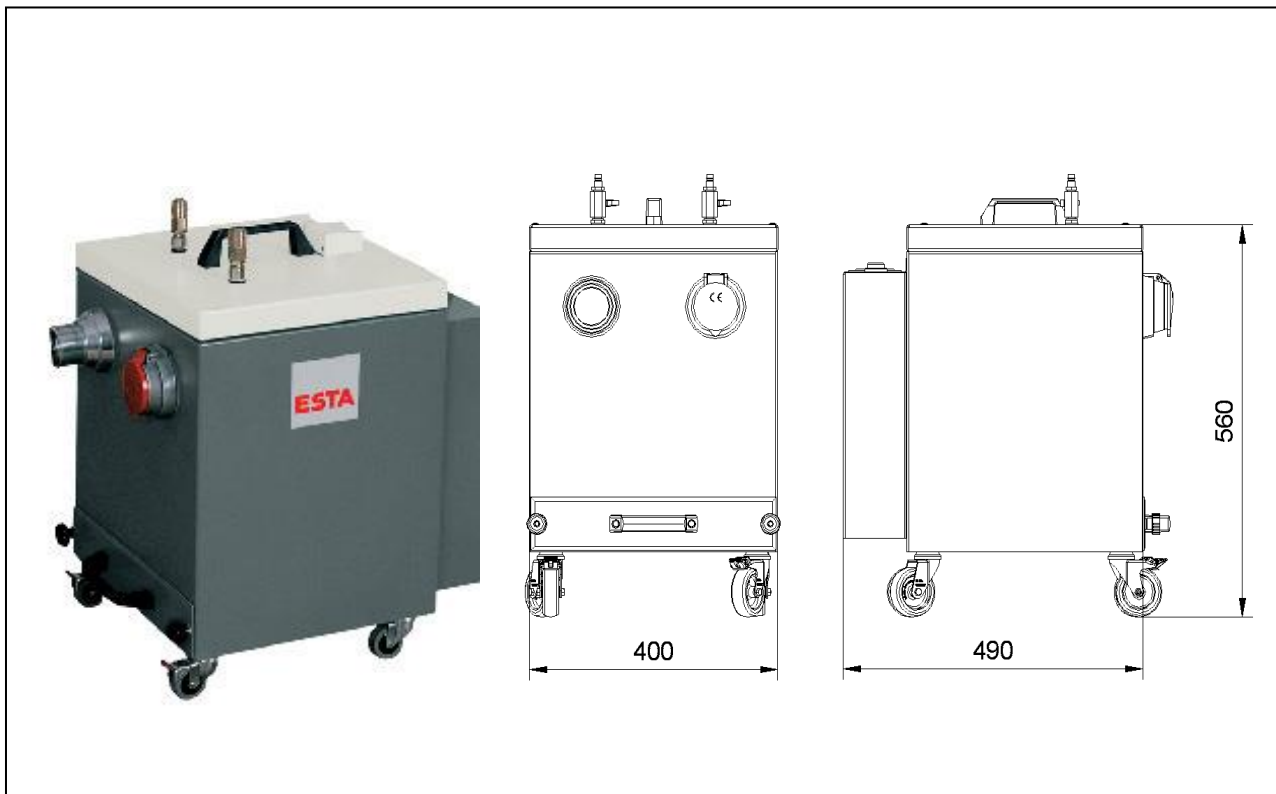

## ESTA PLUS

### Application Range:

- Outside work, assembly or construction sites.
- Non-alloy steels.

### Your benefits at a glance:

- Portable units that can be used in any location.
- Compact and functional design.
- Low operating costs with cleanable long life cartridge filters (dust classification M).

### Characteristic:

- Integrated compressed air cleaning nozzle.

### Modifications:

- Custom design with customs colours.
- Filter cartridge for soldering fume.

State of the art: 55102-51-00 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG  
Gotenstraße 2 – 6  
89250 Senden / GERMANY

Phone +49 7307 804-0  
Fax +49 7307 804-500  
E-Mail info@esta.com

[www.esta.com](http://www.esta.com)