

(56.200)

420

66

ca. 50


640x650x510

– DIE GANZE WELT DER ABSAUGTECHNIK

# OILMAC 400

Motor	(kW)	0,24	max. airflow	(m³/h)
Voltage	(V)	230	Sound level	(dBA)
Rated frequency	(Hz)	50	Weight	(kg)
Intake	(mm)	150	Dimensions	(mm)

6₩ Φ	• • •	
 	640 640	
(20)	\. e	

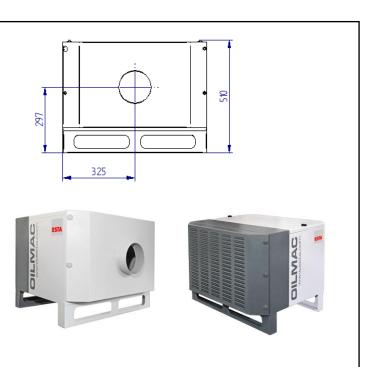

# ESTA PLUS

## Application range:

Extraction of oil and emulsion mistMinimal lubrication mist and smoke

# Characteristics:

- Mechanical filtration
- •With postfilter H13 for recirculation mode

## Your benefits at a glace:

- •Compact unit for the extraction of oil and emulsion mist
- •Easy installation on top of the processing machine
- •Three power ratings available
- •Multi-filter system

#### Modification:

- •With motor protection switch
- •With potential free contact
- With special voltages
- •With exhaust air connection
- With special painting
- Mobile on wheels
- •With stand for adjacent installation

State of the art: 56200-51-00 Subject to change without notice! For remaining questions please do not hesitate to contact us.

Gotenstraße 2–6 89250 Senden Telefax 07307804-500 E-Mail info@esta.com

