


FILTOWER L-100

(660.100)

Voltage	(V)	400	Filter surface	(m ²)	76
Motor	(kW)	2 x 3,0	No. of filter elements	(pc)	4
Ampere	(A)	8,5	Filter material	Dust class M	
Rated frequency	(Hz)	50	Filter cleaning	No	
Fuse	(A)	C16	Weight	(kg)	ca. 970
Intake port (L x W)	(mm)	1.295 x 295	Collection bin	(liter)	ca. 100-150
max. neg. pressure intake	(Pa)	2.800	Dimensions (L x W x H)	(mm)	2.060 x 1.515 x 2.910
max. air flow	(m ³ /h)	10.000	Sound level	(dBA)	68

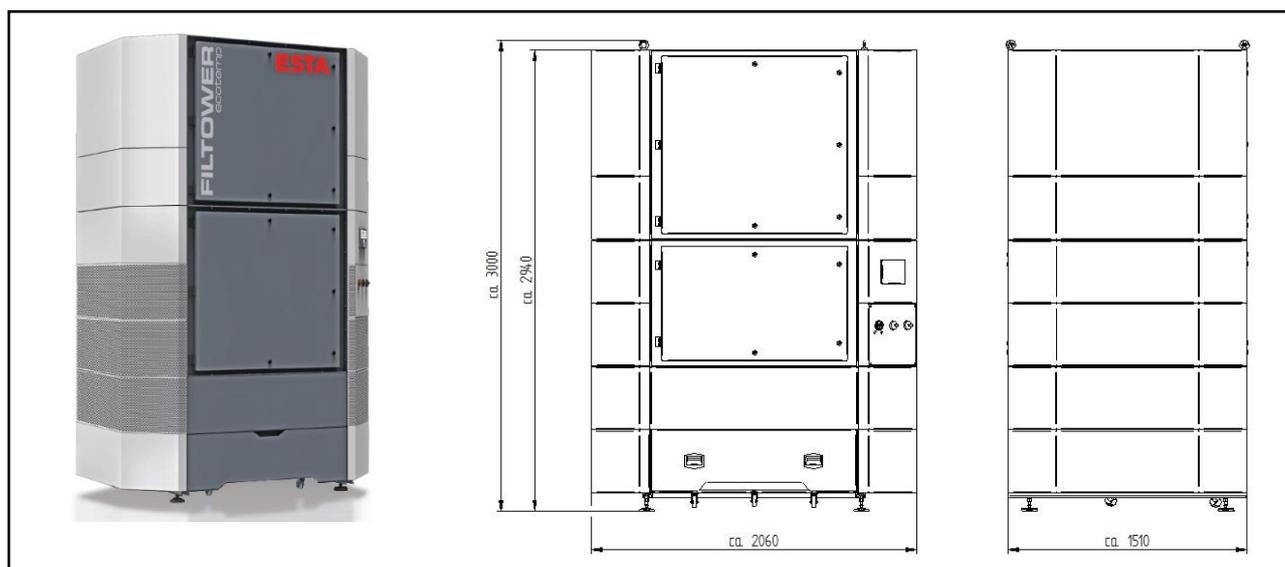

ESTA PLUS

Application range:

- Extraction of oil and emulsion
- For improving room air quality

Characteristics:

- Cleanable permanent filter cartridge featuring dust class M
- Newly conceptualised EasyControl controller
- Integrated

Your benefits at a glance:

- Ready to use – the filter tower comes preassembled
- Low operating costs thanks to cleanable permanent filter cartridges
- Compact design with low space requirements
- Flexibility – can be moved any time to a different set-up location

Options:

- Activation via potential-free contact
- Active charcoal inserts in front of outlet openings
- Model featuring frequency inverter, *eco**, *ecotemp*, 4.0
- ecotemp* with heat exchanger

State of the art: 660100-51-02 Subject to change without notice! For remaining questions, please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
 Gotenstraße 2 – 6
 89250 Senden

Telefon 07307804-0
 Telefax 07307804-500
 E-Mail info@esta.com

www.esta.com