


FILTOWER D-160

(663.160)

Voltage	(V)	400	Filter surface	(m ²)	160
Motor	(kW)	2 x 4,0	No. of filter elements	(pc)	4
Ampere	(A)	15,3	Filter material		Dust class M
Rated frequency	(Hz)	50	Filter cleaning		Jet-cleaning
Fuse	(A)	C16	Weight	(kg)	ca. 1.100
Intake port (L x W)	(mm)	1.295 x 295	Collection bin	(liter)	ca. 100-150
max. neg. pressure intake	(Pa)	2.800	Dimensions (L x W x H)	(mm)	2.060 x 1.515 x 3.400
max. air flow	(m ³ /h)	15.000	Compressed air requirement	(l/Impuls)	70 at 0,120s
Sound level	(dBA)	77	Compressed air connection	(inch)	¼"

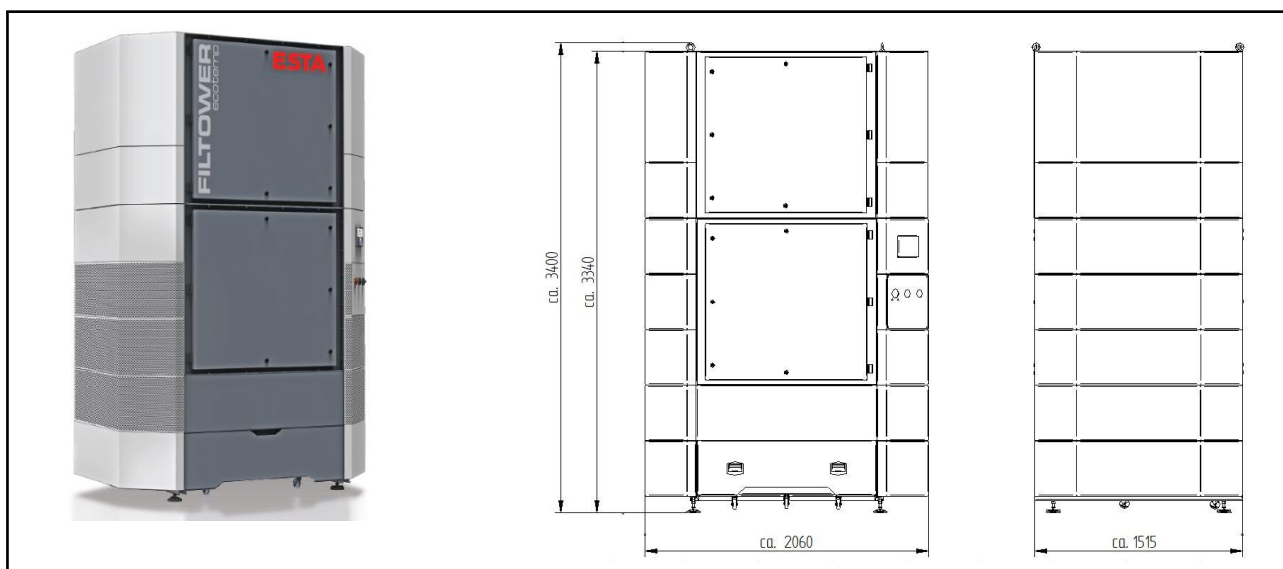

ESTA PLUS

Application range:

- Fume extraction of dry, oil-free welding fumes arising during welding of metals
- For improving room air quality

Your benefits at a glance:

- Ready to use – the filter tower comes preassembled
- Low operating costs thanks to cleanable permanent filter cartridges
- Compact design with low space requirements
- Flexibility – can be moved any time to a different set-up location

Characteristics:

- Jet filter cleaning
- Cleanable permanent filter cartridge featuring dust class M
- Newly conceptualised EasyControl controller
- Integrated

Options:

- Activation via potential-free contact
- Active charcoal inserts in front of outlet openings
- Model featuring frequency inverter, *eco+*, *ecotemp*, *4.0*
- *ecotemp* with heat exchanger

State of the art: 633160-51-02 Subject to change without notice! For remaining questions, please do not hesitate to contact us.