


Wet separator

X45901

DUSTOMAT HYDRO 10000

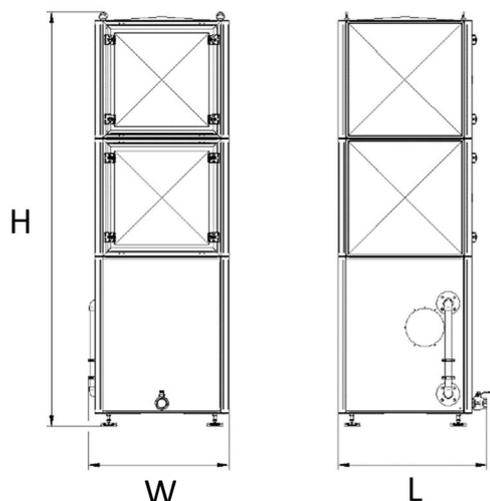

Technical data (Technical data and drawings may vary)

Mains voltage	400 V	Water connection	3/4"
Nominal power	15 kW	Water drainage	2"
Nominal current	25,3 A	Water content	515 L
Mains frequency	50 Hz	Weight	870 kg
Circuit breaker	C50A	Intake opening	Ø 400 mm
Max. negative pressure	4.800 Pa	Outlet opening	Ø 710 mm
Max. volume flow	10.000 m ³ /h	Dimensions (L x W x H) **	1.350 x 1.550 x 3.400 mm
Sound pressure level *	[dBA] 80,5		

* Specified sound values may vary in air extraction operation

** Dimensions without control cabinet

Application range

- » Extraction of metallic dusts (aluminium, titan, steel, stainless steel, brass, copper, e.g.)
- » For the single or multi-station extraction of dry, free flowing, materials
- » Ideal solution for heavy flying sparks

Special Features

- » Components in contact with media made of Stainless steel: V2A (DIN 1.4301)
- » Filter stage 1: Separation via innovative washer chamber with particularly high degree of separation, 98,7% even with the smallest particle fractions of $\geq 15 \mu\text{m}$
- » Filter stage 2: Downstream droplet separator with optimised maintenance access, which reduces the residual moisture content of the exhaust air to a minimum
- » Filter stage 3: With metal mesh, pre-filter (M5) Filter class according to ISO 16890: ISO ePM10 65% or prefilter (F9) Filter class according to ISO 16890: ISO ePM1 80%
- » Filter stage 4: With post-filter (F9) Filter class according to ISO 16890: ISO ePM1 80% or post-filter (H14)
- » Filter class according to ISO 29463: ISO 45 H (separation efficiency $\geq 99,995 \%$).

Design

- » ESTA standard painting (with C3/H)
- » With potential-free contact (On/Off)
- » Device signage: ESTA / German
- » Country-specific regulations: EU

Options

- » Device completely made of stainless steel V2A (DIN 1.4301) or V4A (DIN 1.4404)
- » Operating duration: diverse shift operation
- » Operating mode: Air recirculation operation
- » Operating mode: Air extraction operation
- » Intake port position: Right, left or at the back
- » Fill level tube position: Left or right
- » Switch cabinet becomes Unassembled or fixed
- » Accessory package: Noise package
- » Monitoring functions: Operating message, Volumetric flow control, Fill level monitoring & automatic filling, Maintenance & operating hours counter, Safety filter monitoring, Fill level monitoring DGUV 109-001
- » ATEX marking:
Dust inside II 3D Ex h IIC T 125 °C Dc X
Gas inside II 3G Ex nA IIC T3 Gc X

State of the art: This document was generated automatically. Technical changes reserved!