


AirBox

(55503)

Connection voltage	(V)	230	Filter area	(m ²)	13.57
Nominal frequency	(Hz)	50 / 60	Number of filter elements (units)		3
Drive power	(kW)	0.51	Max. airflow volume	(m ³ /h)	950
Nominal current	(A)	2.2	Connection diameter	(mm)	140
Circuit breaker	(A)	C16	Weight	(kg)	approx. 100
Protection class		IP 54	Dimensions (L x W x H)	(mm)	
Sound pressure level	dB(A)	68.5	Without extraction arm		692 x 660 x 959
			With extraction arm		2262 x 660 x 1976

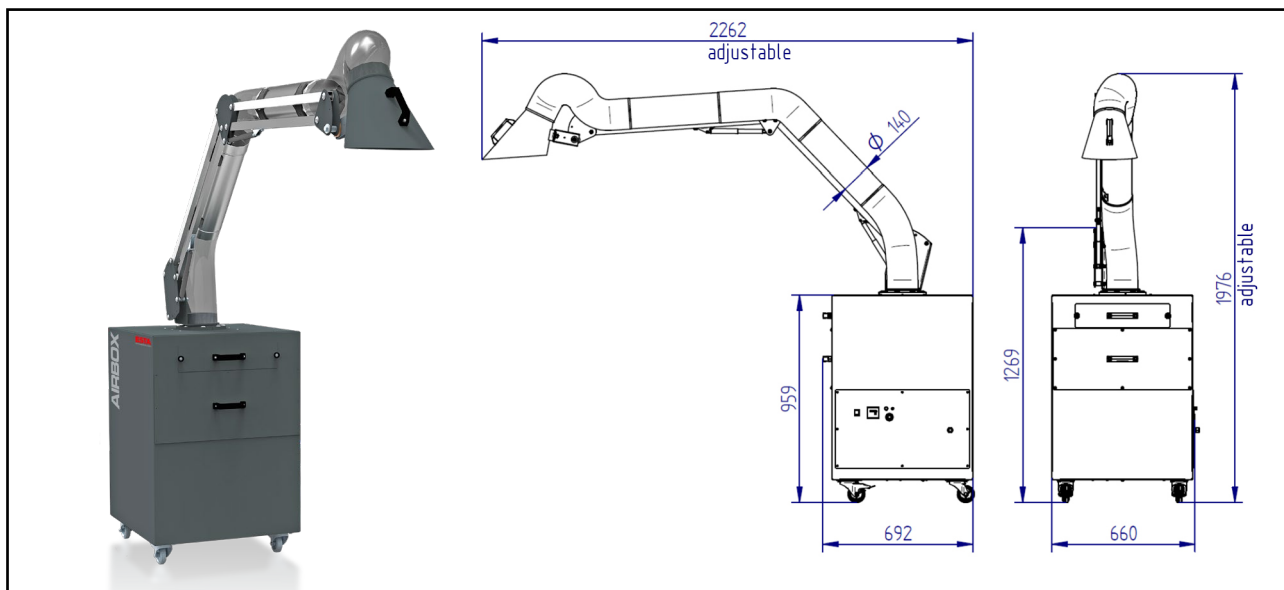

ESTA PLUS

Area of application:

- Single-station extraction with precise collection in industry and trade
- Suitable for welding fumes, free-flowing and dry dusts

The benefits to you at a glance

- Precision smoke and dust collection
- Suitable for continuous operation
- Compact and handy design
- For use at various, changing workstations
- Simple and dust-free disposal of collected material by means of drawer
- Dust class M filter cassette
- Quite and energy-saving operation through EC technology

Special feature:

- Rotating and flexible extraction arm mounted on the device
- Compact, flow-optimised suction hood
- Operating hours counter

State of the art: 55503-51-02 Subject to technical changes! In case of questions, ESTA experts are willing to help.