


(81.200)

EUROSOG-I-D ATEX

Voltage	(V)	400	Filter surface pre-filter,,H"	(m²)	2
Motor	(kW)	2,2	Filter surface main filter	(m²)	1
Current	(A)	4,6	Filter cleaning		manuell
Rated frequency	(Hz)	50	Weight	(kg)	81
Fuse	(A)	16	Intake	(mm)	50
Max. neg. pressure	(Pa)	19.500	Dust collection bin	(Liter)	80
Max. airflow	(m³/h)	360	Dimension (L x W x H)	(mm)	1.030 x 660 x 1.140
Sound level	(dBA)	72			

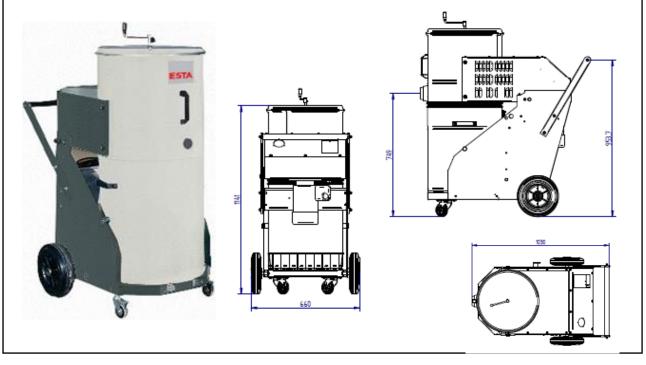

ESTA PLUS

Application range:

Removal of coarse and fine dust during cleaning works
Removal of coarse and fine, non-conductive dusts up to + 135°C in zone 22

Your benefits at a glance:

- Powerful industrial vacuum cleaner for dry, pourable types of dust
- •Tight and easy-to-handle design
- •Easy disposal of the dust collection bag
- •Great range of products of accessories for the vacuum cleaner
- •

State of the art: 81200-51-02 Subject to change without notice! For remaining questions please do not hesitate to contact us.. ESTA Apparatebau GmbH & Co. KG Telefon 07307804-0

Gotenstraße 2–6 89250 Senden Telefax 07307804-500 E-Mail info@esta.com

Characteristics:

- •Filter cleaning: manual brush cleaning
- •Cleanable long life cartridge filters (dust classification M)
- •Patented tiltable filter housing
- •Three-phase current
- •Suitable for use in Zone 22 and for disposal of nonconductive dusts up to + 135°C

Modification:

- •With different filter cartridges
- •Special voltage, Special painting,
- Mobile dust collection bin
- •Installation of a pre-separator possible

www.esta.com